



# Design & Function

A perfect glass assortment



Glass Push Button II Smart



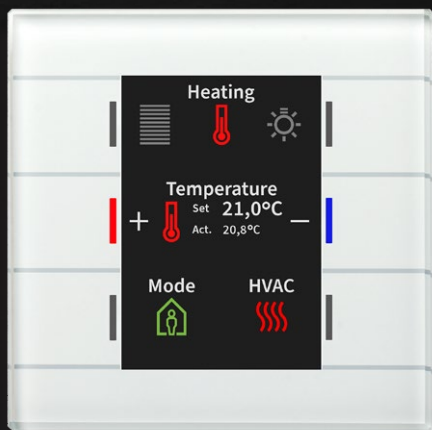

Glass Push Button II Smart



## Glass Push Button II Smart

The Glass Push Button II Smart combines functionality & design. It enables quick and easy operation of various functions such as lighting, scene, blinds and colour control. Additionally equipped with a temperature sensor, comfortable temperature adjustment is possible. The large active colour display is used for function and status indication and is freely configurable. A variety of symbols and colour variants are available to the user. There are almost no limits to the individual design of the glass push button.



## FUNCTIONS

Large, active colour display for function and status indication

Background colour of the display adjustable (white or black)

Up to 12 functions distributed over 2 or 3 levels (2 x 6 or 3 x 4 functions)

Symbols and free texts adjustable for each key/function

The keys are freely adjustable as a pair of keys or as individual keys

Single and two-button operation for switching, dimming, blinds, values

RGB status of each sensor surface individually controllable per level

Slap function with additional switching channel

Display of indoor/outdoor temperature, time and user-defined messages

## TECHNICAL DATA

**BE-GT20W.02** | White

**BE-GT20S.02** | Black

Six sensor areas

4/6/8/12-fold push button

Recommended mounting height 1.10 – 1.25 m (as push button)

Dimensions (W x H) 92 mm x 92 mm

Three years product warranty

**BE-GT2TW.02** | White

**BE-GT2TS.02** | Black

with temperature sensor

Six sensor areas

4/6/8/12-fold push button

Recommended mounting height 1.50 – 1.60 m (as control unit)

Dimensions (W x H) 92 mm x 92 mm

Three years product warranty



Glass Push Button II Lite



## Glass Push Button II Lite

The Glass Push Button II Lite takes over the important operating functions in the room. The extensive application enables functions such as switch/dim lighting, blinds, value and scene control and the slap function. The new Multi-tip function and the innovative group control extend the convenient range of functions. The keys are freely adjustable as a key pair or individual keys. The Glass Push Button II Lite is available as single and double push button in the colours white and black. Different variants are available, neutral without labeling, labelled versions with I/O symbol or up/down symbol, as well as variants with integrated temperature sensor. RGBW LEDs are available as status indicators. The separate white LED ensures a clear white in the status display.

The Glass Push Button II Lite (mounting height 1.1 m) can be excellently combined with the Glass Push Button II Smart as control unit or the Glass Central Operation Unit Smart, each with a mounting height of 1.6 m.

### TECHNICAL DATA


Glass Push Button II Lite 1-fold, RGBW	White	Black
NEUTRAL	<b>BE-GTL10W.01</b>	<b>BE-GTL10S.01</b>
NEUTRAL with temperature sensor	<b>BE-GTL1TW.01</b>	<b>BE-GTL1TS.01</b>
UP/DOWN Symbol	<b>BE-GTL10W.A1</b>	<b>BE-GTL10S.A1</b>
I/O symbol with temperature sensor	<b>BE-GTL1TW.B1</b>	<b>BE-GTL1TS.B1</b>
.....		
Recommended mounting height 1.10 m		
Dimensions (W x H) 92 mm x 92 mm		
Three years product warranty		



### FUNCTIONS

- Extensive application
- Innovative group control, with long/extra long keystroke
- Multi-tip function, transmits up to 4 values/DPTs
- The keys are freely adjustable as a pair of keys or as individual keys
- Single and two-button operation for switching, dimming, blinds, values
- Short/long keystroke and 2 objects
- Slap function with additional switching channel
- Status LEDs in RGBW version (separate white LED)
- LED brightness over day/night or brightness object controllable
- Integrated bus coupling unit

Glass Push Button II Lite 2-fold, RGBW	White	Black
NEUTRAL	<b>BE-GTL20W.01</b>	<b>BE-GTL20S.01</b>
NEUTRAL with temperature sensor	<b>BE-GTL2TW.01</b>	<b>BE-GTL2TS.01</b>
UP/DOWN Symbol	<b>BE-GTL20W.A1</b>	<b>BE-GTL20S.A1</b>
I/O symbol with temperature sensor	<b>BE-GTL2TW.B1</b>	<b>BE-GTL2TS.B1</b>
UP/DOWN and I/O symbol with temperature sensor	<b>BE-GTL2TW.C1</b>	<b>BE-GTL2TS.C1</b>
I/O and UP/DOWN symbol with temperature sensor	<b>BE-GTL2TW.D1</b>	<b>BE-GTL2TS.D1</b>
.....		
Recommended mounting height 1.10 m		
Dimensions (W x H) 92 mm x 92 mm		
Three years product warranty		

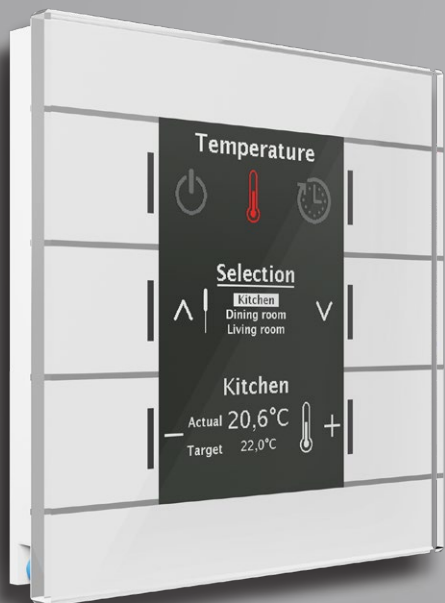

Glass Central Operation Unit Smart



## Glass Central Operation Unit Smart

The Glass Central Operation Unit Smart combines a multitude of functions in one device and serves as a central control unit for your Smart Home. The integrated astronomical time switch automatically raises and lowers the blinds in the morning and after sunset. In addition, at sunset the basic lighting in the house is switched on until midnight and the outdoor lighting is activated. All timer functions and switching times are individually adjustable.

Using the menu control, you can, for example, set the comfort temperature for all rooms individually or activate automatic shading. You can also lock your blinds for window cleaning or activate your KNX alarm system via the integrated code lock. The Glass Central Operation Unit Smart is the ideal complement to the Glass Push Button II Smart or Glass Push Button II lite.



The Glass Central Operation Unit Smart was awarded with the German Innovation Award 2019 in the category „Excellence in Business to Business – Building & Elements“ as „Special Mention“ in May 2019.

## FUNCTIONS

Large, active colour display for function and status indication

Background colour of the display adjustable (white or black)

Four direct control functions (e.g. Present, light, blind)

Twenty Operating functions via menu/switch timer (e.g. dimmer/shutter/switching/sending values)

Code lock with 4–6 digits for device locking or alarm activation

Daily/weekly/astro timer (20 channels with 6 switching times each)

Holiday function with period activation

Automatic calculation of public holidays

Comfortable room thermostat with temperature sensor

Ventilation control (manual or automatic)

Display of indoor/outdoor temperature, setpoint and time/date

## TECHNICAL DATA

**BE-GBZW.01** | White

**BE-GBZS.01** | Black

Six sensor areas

Room temperature controller with temperature sensor

Four direct functions

Twenty operating functions via menu/switch timer

Recommended mounting height 1.50–1.60 m (as control unit)

Dimensions (W x H) 92 mm x 92 mm

Three years product warranty



Glass Push Button Plus 4-/8-fold



## Glass Push Button Plus 4-/8-fold

The Glass Push Button Plus is available in 4-/8-fold versions in white and black. It can be individually configured with functions such as switch/dim lighting, blinds, valve and scene control. The sensor areas can be parameterised as a pair of keys (two-areas) or as individual keys. Each sensor area has a two-colour LED (white/red). A circumferential orientation light gives the Glass Push Button Plus a special accent and ensures that it is also easy to find at night. The orientation light is adjustable in 5 brightness levels, day and night independently of each other.

The Glass Push Button Plus has a panic function, which represents an additional switching function. The built-in cleaning function ensures that the function of the sensor area surfaces is switched off when the glass surface is cleaned. It is individually marked with a special laser foil. A labeling template with many symbols and free text is available for this purpose. If your wishes change over time, the glass buttons are parameterised differently and the labelling foil is simply replaced. The glass buttons are optionally available with an integrated room temperature sensor.

### TECHNICAL DATA

	White	Black
Glass Push Button Plus 4-fold	<b>BE-GT04W.01</b>	<b>BE-GT04S.01</b>
Glass Push Button Plus 4-fold with temperature sensor	<b>BE-GTT4W.01</b>	<b>BE-GTT4S.01</b>
Four sensor areas		
Circumferential LED orientation light		
Recommended mounting height 1.10 m		
Dimensions (W x H) 92 mm x 92 mm		
Three years product warranty		



### FUNCTIONS


The keys are freely adjustable as a pair of keys or as individual keys

Transmission of values, priority control and switching commands adjustable

Push button operation with short/long push button action and 2 objects

White/red LED per sensor area

LED brightness adjustable in 5 steps via day/night object

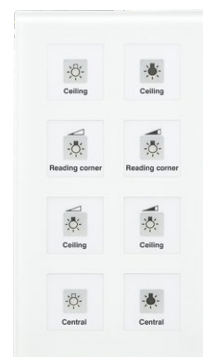


	White	Black
Glass Push Button Plus 8-fold	<b>BE-GT08W.01</b>	<b>BE-GT08S.01</b>
Glass Push Button Plus 8-fold with temperature sensor	<b>BE-GTT8W.01</b>	<b>BE-GTT8S.01</b>
Eight sensor areas		
Circumferential LED orientation light		
Recommended mounting height 1.10 m		
Dimensions (W x H) 92 mm x 163 mm		
Three years product warranty		



## Glass LED Indicator

You would like to know whether a door or a window of the house is still open? Or whether your washing machine is still running in the basement?

The MDT Glass LED Indicator shows it to you at a glance without much reading. There are 12 independent LEDs in red, green, blue or white; flashing or permanently lit. States such as OPEN/CLOSE, ON/OFF and fault can be immediately recognised. The brightness of the LEDs is adjustable in 2 steps. The Glass LED Indicator can be individually labelled with a label template and is available in white and black.

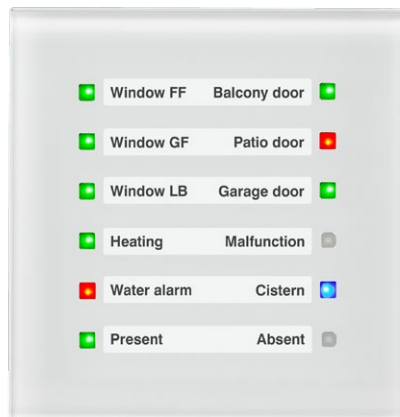

## FUNCTIONS

- Twelve independent switchable RGB LEDs
- Three objects per LED
- Five states per LED adjustable
- Eight logic blocks with 8 inputs each
- Two brightness levels
- Day/night object
- Switch-off/reduction of brightness/failure
- Monitoring of the objects with signalling object
- Marking foil for insertion under the glass surface

## TECHNICAL DATA


**SCN-GLED1W.01** | White  
**SCN-GLED1S.01** | Black

Twelve RGB LEDs

Recommended mounting height 1.50–1.60 m


Dimensions (W x H) 92 mm x 92 mm

Three years product warranty

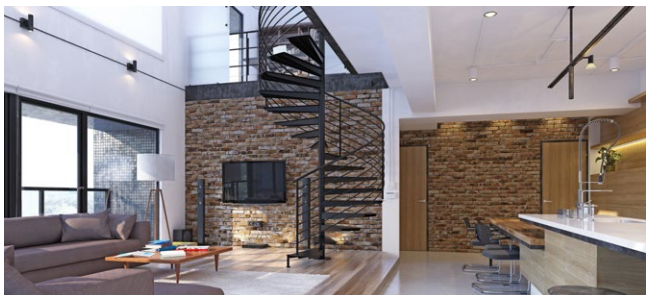

## Glass Room Temperature Controller

The Glass Room Temperature Controller ensures cosiness in the room with the correct comfort temperature. On the active colour display, for example, the setpoint and actual temperature and the current states can be shown. If the automatic control is not suitable for the user, he can adjust the desired temperature via the four sensor surfaces on the controller or also make specifications for ventilation. The automatic setpoint adjustment can also be guided not only by the lux value of the weather station, but alternatively by the outside temperature or an external 0-100% value. The KNX system then regulates heating and ventilation to the desired values.

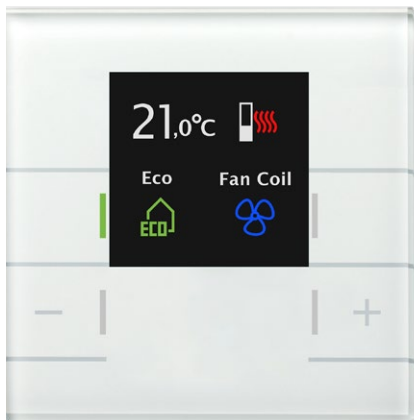

### FUNCTIONS

Room temperature controller  
with temperature sensor (-10 to +50 °C)

Display of set and actual temperature

Active colour display to indicate function and status

Ventilation functions  
(manual or automatic)

Simple setpoint adjustment via separate + / - buttons

Limit values min/max, frost alarm,  
min/max value memory

Setpoint values are stored on bus voltage failure

Selectable temperature controller (PI, two-position, PWM)

### TECHNICAL DATA

**SCN-RTRGW.02** | White

**SCN-RTRGS.02** | Black

Active colour display


Room temperature controller  
with temperature sensor

Two direct functions

Recommended mounting height 1.50 – 1.60 m

Dimensions (W x H) 92 mm x 92 mm

Three years product warranty

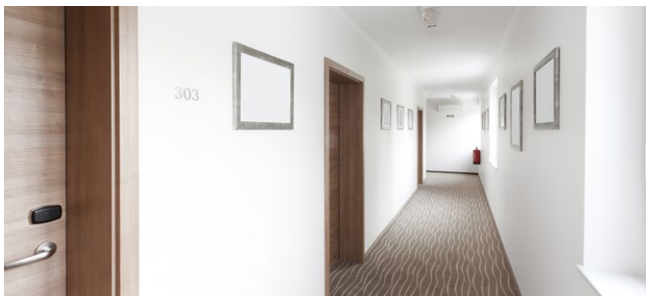

## Glass Presence Detector 360°

More comfort, more safety and more energy efficiency. With these features the Glass Presence Detector 360° presents itself and complements the existing glass programme of MDT. With its 3 sensors, it not only automatically controls the light, but also heating/air conditioning/ventilation and room monitoring. An integrated temperature sensor additionally supplies the room temperature. An extensive application enables many practical functions. The 360° glass presence detector with intelligent constant light control is also available as an extension to the range.

## FUNCTIONS

- Glass front in white, integrated temperature sensor
- Adjustable standby and presence sensitivity for day, night and alarm
- Short-term presence to reduce the follow-up time
- Blocking and override function with release time
- Extensive day/night function with 2nd switch object
- Orientation light (brightness and time adjustable)
- Input for external pushbutton with release time

## TECHNICAL DATA



### SCN-G360D3.02 | White

Three sensors

Range 11 m Ø, Presence 5 m Ø

With temperature sensor

Three light channels, individually evaluable

One HVAC and 1 alarm/message channel

Recommended mounting height 2.50–4.00 m

Dimensions (W x H) 92 mm x 92 mm

Three years product warranty

### SCN-G360K3.02 | White

Intelligent constant light control

Three sensors

Range 11 m Ø, Presence 5 m Ø

With temperature sensor

Three light channels, individually evaluable

One HVAC and 1 alarm/message channel

Recommended mounting height 2.50–4.00 m

Dimensions (W x H) 92 mm x 92 mm


Three years product warranty



## Glass cover frame for 55 mm switch ranges

A fully equipped room includes sockets, a telephone connection, a network connection and much more. MDT offers white and black glass cover frames matching 55mm switch ranges from GIRA, JUNG, SCHNEIDER ELECTRIC or HAGER. Thereby ensuring that sockets and all other connections become an eye-catcher.

The MDT switch range 55mm in plastic, in the colours pure white matt, pure white glossy and black matt, can be excellently combined with the glass cover frames.

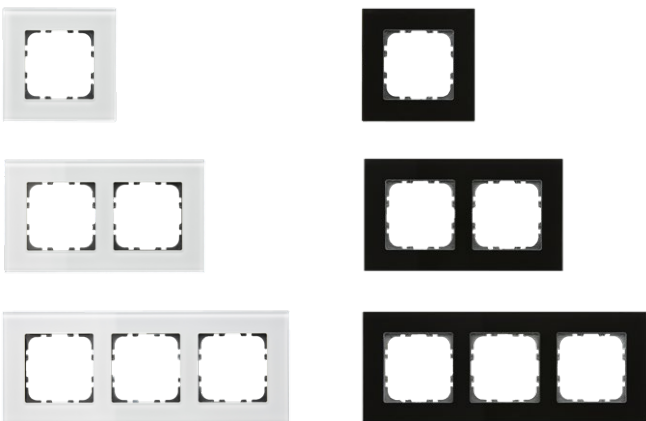

## OVERVIEW

Suitable 55 mm switch ranges

**GIRA**

Standard 55, E2, E22, Event, Esprit

**JUNG**

A 500, A PLUS, A CREATION,  
AS 500, A 550, A FLOW

**SCHNEIDER ELECTRIC**


Merten 1M, Merten M-Smart,  
Merten M-Plan, Merten M-Pure

**HAGER**

Berker S1, Berker B3, Berker B7

**MDT**

Assortment 55 mm



## TECHNICAL DATA

**BE-GTR1W.01** | White

**BE-GTR1S.01** | Black

Glass cover frame 1-fold

Dimensions (W x H) 92 mm x 92 mm

**BE-GTR2W.01** | White

**BE-GTR2S.01** | Black

Glass cover frame 2-fold

Dimensions (W x H) 92 mm x 163 mm

**BE-GTR3W.01** | White

**BE-GTR3S.01** | Black


Glass cover frame 3-fold

Dimensions (W x H) 92 mm x 234 mm

Variant overview  
Glass Push Button II Lite 1-fold




BE-GTL10W.01




BE-GTL10S.01




BE-GTL20W.01



BE-GTL20S.01




BE-GTL2TW.B1  
with temperature sensor



BE-GTL2TS.B1  
with temperature sensor




BE-GTL1TW.01  
with temperature sensor



BE-GTL1TS.01  
with temperature sensor



BE-GTL2TW.01  
with temperature sensor



BE-GTL2TS.01  
with temperature sensor



BE-GTL2TW.C1  
with temperature sensor



BE-GTL2TS.C1  
with temperature sensor



BE-GTL10W.A1



BE-GTL10S.A1



BE-GTL20W.A1



BE-GTL20S.A1



BE-GTL2TW.D1  
with temperature sensor



BE-GTL2TS.D1  
with temperature sensor



BE-GTL1TW.B1  
with temperature sensor




BE-GTL1TS.B1  
with temperature sensor




BE-GTL40W.01



BE-GTL40S.01




BE-GTL4TW.01  
with temperature sensor




BE-GTL4TS.01  
with temperature sensor

Variant overview  
Glass Push Button II Lite 2-/4-fold


## Functional overview Glass Push Button II Smart



Level 1  
e. g. light




Status displays/  
text messages



Level 2  
e. g. blinds



Four keys  
with info display

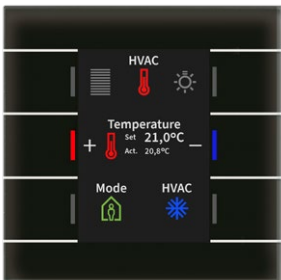

Level 3  
e. g. HVAC



Six keys/  
2 x 6 keys

## Functional overview Glass Central Operation Unit Smart



Four direct functions



Heating/ventilation




Menu control light



Time switch



Code lock

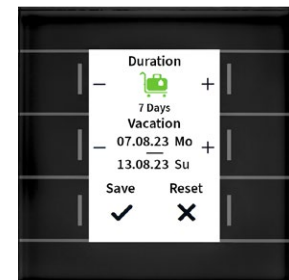

Holiday function

Photo credit:

page 1: @virtua73 – stock.adobe.com, pages 2|3: @peshkova – stock.adobe.com,  
pages 4|5: @2mmedia – stock.adobe.com, pages 6–9: @2mmedia – stock.adobe.com,  
page 10: @virtua73 – stock.adobe.com, page 11: @victor zastol'skiy – stock.adobe.com,  
page 12: @srki66 – stock.adobe.com, page 13: @Alexandre Zveiger, www.photobank.ch, 6900 Lugano, Switz



**MDT**  
TECHNOLOGIES

**MDT technologies GmbH**  
Papiermühle 1 · 51766 Engelskirchen  
Phone +49 22 63 88 - 0 · Fax +49 22 63 45 88  
knx@mdt.de · www.mdt.de

